


COUPLEMATE TRAILER PARTS

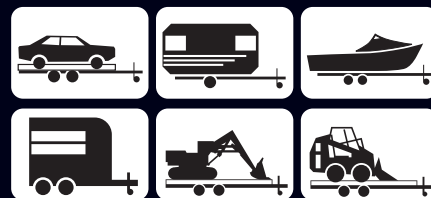

4WD, TRAILER AND RV PARTS

SAFETY CHAIN SYSTEM

TOWBARSTRUCKS, TRAILERS AND TOWBARS



A scene without Safety Chains...

It only takes the failure of a small component to cause a catastrophe like this. The risks of accidental trailer separation are very real ...

- ▲ Lack of coupling maintenance
- ▲ Incorrect coupling installation
- ▲ Inadequate to bar design
- ▲ Use of non genuine coupling parts
- ▲ These are just some of the possible causes.

Specify the Couplemate Safety Chain System for legal compliance and to eliminate unnecessary risk and liability.

www.couplemate.com

Runaway carnage - Dog Trailer smashes with oncoming car, note drawbar propped up on timber.
Cause - failed bolt-in trailer eye. Driver survived.



Safety Chains

are essential to support and maintain the trailer behind the towing vehicle during accidental trailer coupling separation. In 1996 the Federal Office of Road Safety reported that between one and five Australian road fatalities per year are caused by trailers separating from towing vehicles in transit.*

Complacency Can Kill!
All couplings can accidentally uncouple.

* National Road Transport Commission Regulatory Impact Statement Amendments to ADR 62/00 'D5, July 1996

The Law (ADR 62)

requires that two safety chain attachments be fitted to:-

- ¥ Every rigid drawbar (PIG) trailer exceeding 7,716 lb ATM - No exceptions
- ¥ Every towbar - No exceptions
- ¥ Optional for hinged drawbar (DOG) trailers - See front page accident scene for Dog trailer without chains
- ¥ Attachments are required because the grade T chain specified in ADR 62 is not weldable

CM545 - 546

3/8 inch System - Max 16,534 lb ATM



Towbar Configuration
2 per set - Part No. CM545

Trailer Configuration
2 per set - Part No. CM546



CM550 - 551

1/2 inch System - Max 29,762 lb ATM



Towbar Configuration
2 per set - Part No. CM550

Trailer Configuration
2 per set - Part No. CM551

CM555 - 556

5/8 inch System - Max 47,399 lb ATM



Towbar Configuration
2 per set - Part No. CM555

Trailer Configuration
2 per set - Part No. CM556

CM560 - 561

3/4 inch System - Max 67,240 lb ATM



Towbar Configuration
2 per set - Part No. CM560

Trailer Configuration
2 per set - Part No. CM561



Forget bulky fabrications and chain adaptors

Specifications

- Compact, high tensile, weldable steel castings and heat treated pins
- Tested to ADR 62 strength Requirements
- Rapid Installation - use low hydrogen weld process - detailed instructions provided
- Castings clearly marked with ratings and applicable chain size
- Operation is as simple as it looks